

MUTIARA VERSALITE DEK



More Attractive

More Economical

More Durability



MUTIARA VERSATILE DEK

MUTIARA VERSATILE DEK is a superior light weight roll-formed roofing and wall cladding profile to meet all your designing needs

PROFILE SPECIFICATIONS

	ZINCALUME® Steel	COLORLUME Steel	ZINCALUME® Steel	COLORLUME Steel	ZINCALUME® Steel	COLORLUME Steel	ZINCALUME® Steel	COLORLUME Steel	ZINCALUME® Steel	COLORLUME Steel
Base Metal Thickness (mm)	0.20		0.25		0.30		0.35		0.42	
Total Coated Thickness (mm)	0.25		0.30		0.35		0.40		0.47	
Mass Per Unit Area (kg/m ²)	2.09	2.16	2.56	2.63	3.04	3.11	3.51	3.58	4.17	4.24
Mass Per Unit Length (kg/m ²)	1.59	1.64	1.95	2.00	2.31	2.36	2.67	2.72	3.17	3.22
Coverage (m ² /t)	478	462	390	379	329	322	285	279	240	236

LENGTHS

All products are available from, MUTIRA Metal Enterprise in lengths up to 21 meters custom-cut to your length requirements. Lengths longer than 21 meters can be supplied, provided satisfactory transport and on-site handling can be arranged.

TOLERANCES

Length: +0, - 15mm


Cover width: +_4mm

PACKING

Sheets are packed in strapped bundles of one tonne maximum mass

MINIMUM ROOF SLOPE

The normal recommended minimum roof slope is 1 in 20 (approximately 30) However, in non-cyclonic areas where roofs are in single sheet lengths, with a run of less than 15 meters, a minimum roof slope of 1 in 30 (approximately 20) may be used. For recommended slope of roofs in cyclonic areas, please consult out MUTIRA Metal Enterprise's Office.

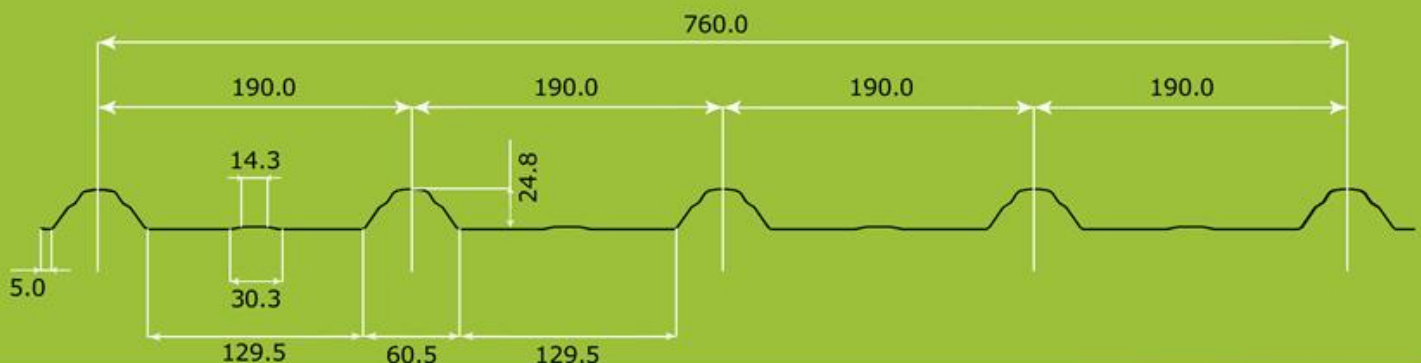

MUTIARA METAL ENTERPRISE SDN BHD

1853 A, Jalan Pasir Hor, Batu 4, Jalan Kuala Krai,
15100 Kota Bharu, Kelantan, Malaysia.

Tel : +609 7481469

Fax : +609 7461849

Email: contact@mutiaragroups.com

*Serve you with
our best attention...*

